

Cooker hood – DAS 2620



Design

- 60 cm wide slimline hood for building into a wall unit
- Extraction or recirculation with optional accessories

Controls

- Auto on/off with pulling out/pushing back in the deflector plate
- EasySwitch for on/off, fan settings and lighting control
- 3 fan settings plus booster setting

Special Features



- 1 dishwasher-proof 10-ply metal grease filter
- Hob illumination via 1 x 3.2 W LED light
- CleanCover for simple cleaning of canopy interior

Extraction Rate

- Fan output according to EN 61591
- Extraction 150 mm Ø: 345 – 925 m³/h
- Recirculation: 345 – 865 m³/h

Optional Accessories for Recirculation

- Conversion kit DUU 151
- AirClean Charcoal filter starter set: DKFS 31-P or Longlife DKFS 31-R
- Charcoal filter refill: DKF 31-P or Longlife DKF 31-R

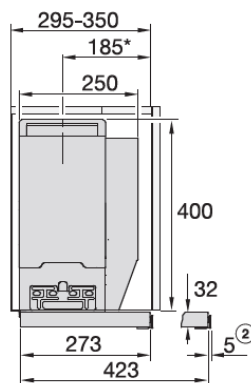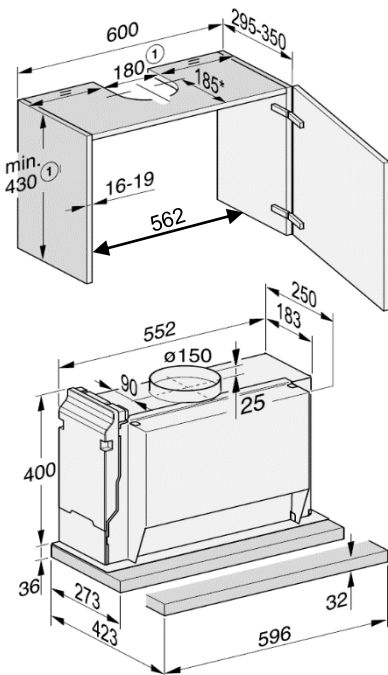

① Extraction or recirculation with conversion kit DUU 150.

② DML 2000 bracket (optional accessory) for fitting a front panel.

In this installation situation, the deflector plate is flush with the front edge of the cabinet niche. If you wish to position the rangehood further forwards or further back, you must adapt the dimensions accordingly (e.g. if you are using a front panel).

The height of the cabinet and the cut-out dimensions must take account of any accessories installed.

Installation requirements

- Rated load 293.2 W
- Fuse rating 10 A
- Length of cable 1.5 m
- With British 3-pin plug (TBC)
- Electrical supply required

Appliance Dimensions

Height: 436 mm
Width: 596 mm
Depth: 273 – 423 mm
Net weight: 14 kg

Minimum safety distance from hob

Electric hob: 450 mm
Gas hob/grill/fryer: 650 mm
Gas hob with >6kW single burner or total output >12.6kW: 760 mm

* The height of the wall unit and cut-out dimensions must take account of any accessories fitted (e.g. silencer, DSM module). Please refer to installation instruction for details.