Built-under wine conditioning unit – KWT 6312 UGS



SommelierSet includes:
- 1 Glass holder
- 1 ConvinoBox
- 2 Covers for telescopic rails

Design
- Tinted glass door with integrated UV filter
- Handleless design with Push2Open mechanism
- Door hinged right, convertible
- Side-by-side combination possible with optional kit
- Front ventilation - no grille required in worktop


Control
- TouchControl
- Digital temperature display
- Dimmable LED lighting

Capacity
- Total usable capacity: 110 litres
- Maximum capacity: 46 bottles (0.75 l Bordeaux bottles)

Special Feature
- 1 temperature zone, adjustable between +5 and + 20°C
- SommelierSet supplied for wine decanting in the unit
- FlexiFrame for storage of different sizes of bottles
- NoteBoard to write wine information with chalks
- 3 telescopic wooden shelves, with FlexiFrame
- 1 fixed rack for compressor recess
- Dynamic cooling
- SoftClose door damper
- Fresh air supply via active charcoal filter with filter change indicator
- Storage with nearly no vibration

Safety
- Locking function of the control panel
- Acoustic temperature/door alarm

Noise Level
- Quiet operation at low sound level: 38 dB (A) re 1pW

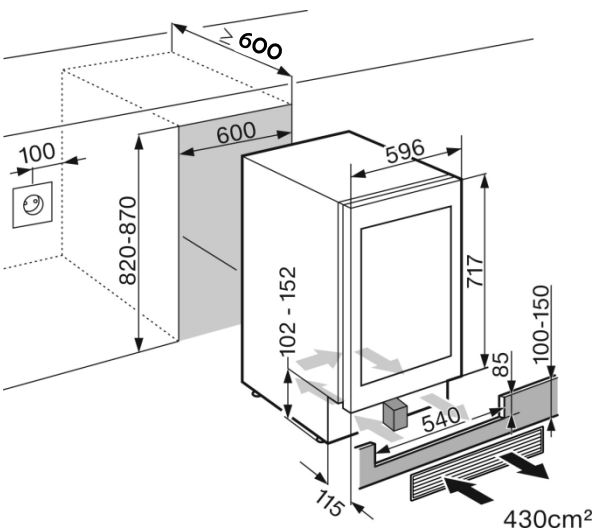

Installation requirements
- 230 – 240 V
- Rated load 240 W
- Fuse rating 13A
- Length of cable: 2.0 m
- Electrical supply required

Niche dimensions

Height:	820 – 870 mm
Width:	600 mm
Depth:	min.600 mm

Appliance dimensions

Height:	818 – 868 mm
Width:	597 mm
Depth:	575 mm

Miele (Hong Kong) Ltd
41/F-4101, Manhattan Place,
23 Wang Tai Road,
Kowloon Bay,
Hong Kong
Tel: + 852 2610 1331 Fax: + 852 2610 1013

Due to continuous product improvement , Miele reserves the right to make changes to products and technical data without prior notice.