

## MasterCool Refrigerator – K 2801 Vi



\*Picture for reference only

- Design**
- 75 cm wide fully integrated refrigerator
  - Door right-hinged, convertible with optional KHK 2010 lh
  - Custom panel or optional Miele stainless steel front panel KFP 3005 ed/cs and toe kick plinth KTK 3020 ed

**Useable capacity** • 461 litres

- Controls**
- Push2open handleless door design, with
  - MaxLoad hinges
  - MasterSensor TFT color touch display
  - Refrigerator temperature adjustment from 2°C to 8°C
  - SuperCool rapid chilling with on/off control

- Special features**
- DynaCool system
  - BrilliantLight lighting
  - Active AirClean filter
  - Visual & acoustic alarm for temperature and door
  - MobileControl function via Miele App<sup>1</sup>


- Refrigerator compartment**
- 2 glass shelves with aluminium edge trim
  - 3 full-width MasterFresh FullAccess telescopic drawers
  - 1 sliding shelf
  - 1 door rack for tins, 3 door rack for bottles

- Energy efficiency**
- 141 kWh in 365 days
  - HK Energy Efficiency: Grade 2
  - EU Energy Efficiency: A++

**Environmental friendly refrigerant** • CFC and HFC free

<sup>1</sup> Please check [miele.hk](http://miele.hk) for the set up requirement.

No electrical connections permitted at the back of the appliance

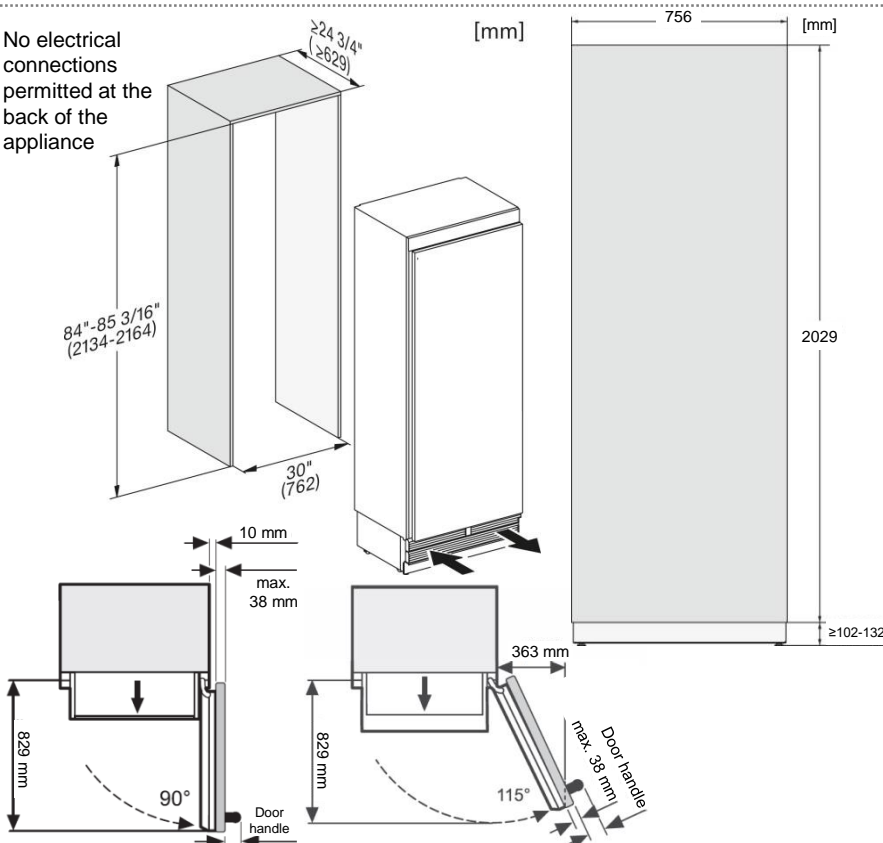

### Installation requirements

- 220-240 V
- Current consumption 3,000 mA
- Calculated rated load 660 W
- Fuse rating 13 A
- With British 3-pin-plug, cable length 3 m.
- Electrical supply required
- Door panel and handle are not included

### Cut-out Dimensions

Height: 213.4 – 216.4 cm  
Width: 76.2 – 76.6 cm  
Depth: min. 62.9 cm

### Appliances Dimensions

Height: 213.1 – 216.1 cm  
Width: 75.6 cm  
Depth: 62.9 cm  
Net weight: Approx. 158 kg

\* Please refer to installation instruction booklet for detailed installation requirement and information.