

Freestanding Washing Machine – WWV 980 WPS



- Design**
- 9kg capacity Honeycomb drum, max spin speed 1600rpm
 - Lotus white, enameled front panel
 - High quality chrome trim door-ring with silver inner ring
 - Door right-hand hinged, 5° angled fascia panel

- Display**
- M Touch control – high quality TFT full touch display
 - Multi-lingual display including Chinese languages

- Intelligent washing**
- Automatic load recognition, Electronic foam sensor

- Wash programmes**
- Cottons, Minimum iron, Delicates, QuickPower wash, Automatic plus, Woollens, Silks, Express 20, Shirts, Denim, Dark garments, Sportswear, Trainers, Outerwear, Proofing, Down filled items, Down duvets, Pillows, Cottons hygiene, Curtains, First wash, Separate rinse, Starch, Freshen up, Steam care, Drain / Spin, Clean machine

- Wash options**
- Quick, Eco, Water plus, Extra rinse, SingleWash Pre-ironing, Pre-wash, Soak, Intensive, AllergoWash, Extra gentle, Extra quiet, Rinse hold, Stains (3 of 23 types)


- Special features**
- Load indicator with dispensing recommendation
 - SteamCare technology for reducing creases from textile
 - MobileControl function via Miele@mobile app¹
 - TwinDos automatic detergent dispensing system with 2-phase system for perfect cleanliness
 - PowerWash 2.0 for high energy efficiency and 10% better wash performance
 - QuickPower Wash for A-grade wash performance in less than 1 hour
 - SingleWash option - efficient washing on very small loads
 - Washing assistant, LED drum lighting
 - Up to 12 favourite user programme setting
 - CapDosing - portioned capsules for washing specific textile such as down-filled items
 - Maintenance-free ProfiEco motor
 - Delay start up to 24 hours, EcoFeedback

- Safety**
- Water Protection System
 - Lock code and Child safety door lock

- Energy consumption**
- Water: 54 litres; Energy: 0.60 kWh per wash cycle according to EN 60456

- EU Energy efficiency**
- Energy: A+++ (50 % less than A+++)
 - Wash performance: A / Spin efficiency: A

¹ Requires app version 2.9 upwards, which will presumably be available in Hong Kong in 2019

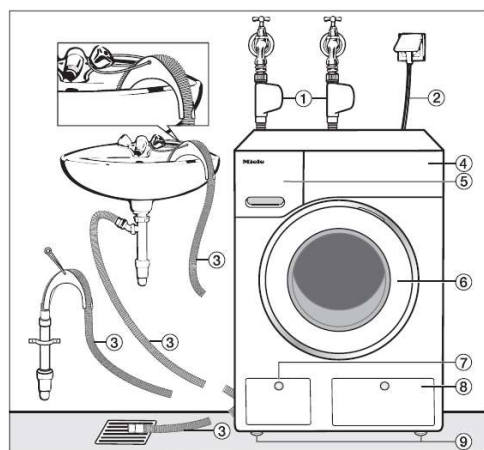

- ① Water intake hose with Waterproof system for alternative water supplies.
- ② Mains connection cable
- ③ Flexible drain hose (with detachable swivel elbow)
- ④ Control panel
- ⑤ Detergent dispenser drawer
- ⑥ Door
- ⑦ Access to filters, pumps and emergency release
- ⑧ Access panel for TwinDos cartridges
- ⑨ Four height-adjustable feet

Installation requirements

- Voltage & Rated load: 220 - 240V, 2.1 – 2.4 kW
- Fuse rating: 13A
- Connections required: Electrical supply, water supply, drain
- Water supply: Inlet hose with 3/4" female threaded union, 1.6m in length. Water flow pressure min. 1 bar, water static pressure max. 10 bar
- Water discharge – Drain hose with an internal diameter of 22mm, 1.5m min length
- Drain hose connection to standpipe, max. 1m from floor level
- Length of connection cable: 2 m

Dimensions

Height:	850 mm
Built-under height:	850 mm
Width:	596 mm
Depth:	643 mm
Depth with door open:	1077 mm
Net weight:	Approx. 96 kg